

To whom it may concern

Uster, 23. July 2026

### **Extension of Validity of EPDs of Naue products to December 2028**

Dear Sir or Madam,

according to Mr. Henning Ehrenberg, Naue GmbH & Co. KG, the production processes at Naue have not changed since the last edition of the Group EPDs established by treeze Ltd., published in 2024. The only change is that energy use has started to switch and will continue to be gradually converted to renewable energy.

This change would result in lower environmental impacts compared to those published. Hence, the last edition of the Group EPDs established by treeze Ltd. can be considered conservative in terms of environmental impacts per declared unit.

Based on this information, its assessment as well as the key characteristics of these EPDs, I confirm that their **validity** can be extended by three years until **December 2028**.

This belongs to:

- EPD-Bentofix, 16.07.2024
- EPD-CARBOFOL, 16.07.2024
- EPD-Secudrain, 16.07.2024
- EPD-Secugrid PET and Secugrid PP, 16.07.2024
- EPD-Secumat, 16.07.2024
- EPD-Secutex, 16.07.2024
- EPD-Secutex H 16.07.2024

Thank you very much for your attention to this matter.



Dr. Rolf Frischknecht  
Owner and Senior consultant

---

# Environmental Product Declaration of Bentofix<sup>®</sup>

---

Author  
**Rolf Frischknecht**

Uster, 16 July 2024

Client  
**Naue GmbH & Co. KG**

---

## Imprint

---

|                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|---------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Title               | Environmental Product Declaration of Bentofix®                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Author              | Rolf Frischknecht<br><br>treeze Ltd., fair life cycle thinking<br>Kanzleistr. 4, CH-8610 Uster<br><br><a href="http://www.treeze.ch">www.treeze.ch</a><br><br>Phone +41 44 940 61 91, Fax +41 44 940 61 94<br>info@treeze.ch                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Client              | Naue GmbH & Co. KG                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Copyright           | All content provided in this report is copyrighted, except when noted otherwise. Such information must not be copied or distributed, in whole or in part, without prior written consent of treeze Ltd. or the customer. This report is provided on the website <a href="http://www.treeze.ch">www.treeze.ch</a> and/or the website of the customer. A provision of this report or of files and information from this report on other websites is not permitted. Any other means of distribution, even in altered forms, require the written consent. Any citation naming treeze Ltd. or the authors of this report shall be provided to the authors before publication for verification. |
| Liability Statement | Information contained herein have been compiled or arrived from sources believed to be reliable. Nevertheless, the authors or their organizations do not accept liability for any loss or damage arising from the use thereof. Using the given information is strictly your own responsibility.                                                                                                                                                                                                                                                                                                                                                                                          |
| Version             | EPD-Bentofix.docx, 16.07.2024                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |

# Environmental Product Declaration Bentofix®



## Declaration holder

Naue GmbH & Co. KG  
Gewerbestr. 2  
D-32339 Espelkamp  
Phone: +49 5743 41 0  
[info@naue.com](mailto:info@naue.com)  
[www.naue.com](http://www.naue.com)

## Declared product:

Bentofix®, geosynthetic clay liner for sealing

## Data calculation by

treeze Ltd.  
Kanzleistrasse 4  
CH-8610 Uster  
[www.treeze.ch](http://www.treeze.ch)

Uster, September 2023



|                                               |                    |
|-----------------------------------------------|--------------------|
| Programme Operator                            | Naue GmbH & Co. KG |
| Date of publication                           | 16 July 2024       |
| EPD validity                                  | December 2025      |
| EPD valid within following geographical area: | Global             |

|                                                                                                                                                                        |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| CEN standard EN 15804:2012+A2:2019 serves as the core PCR                                                                                                              |
| Independent verification of the declaration and data, according to EN ISO 14025:2010<br><input checked="" type="checkbox"/> internal <input type="checkbox"/> external |

# 1 General aspects

This Environmental Product Declaration (EPD) is commissioned by Naue GmbH & Co. KG and accomplished by treeze Ltd. in 2020. The study has been conducted according to the requirements of the standard EN 15804:2012+A2:2019 (EN 15804 2019) and IES product category rules (IES 2018). The investigated products are the Naue clay liners Bentofix® intended for the use in many fields of civil engineering.


This EPD is a revision and extension of a work done in 2017 for the same kind of geosynthetics (Naue UE 2017). In comparison to 2017, the data are evaluated based on new background inventory where available. Furthermore, in this revision also the “end of life stage” (C1 – C4) is evaluated.

## 2 Product

### 2.1 Description and Application

The investigated products belong to the Naue product family Bentofix® intended for the use in many fields of civil engineering. The raw material and energy demands are based on the annual production of Bentofix® and does not reflect a specific product but the product family. The classification number according to the UN CPC classification system is 36950.

The Bentofix® product line is mainly used for applications such as waste and contaminated soil caps, landfill base liners, gas and vapour seals, surface impoundment liners, secondary containment, dams, canals, and water courses, tailings containment, ground-water protection, sorptive barriers, vertical barriers and waterproofing.

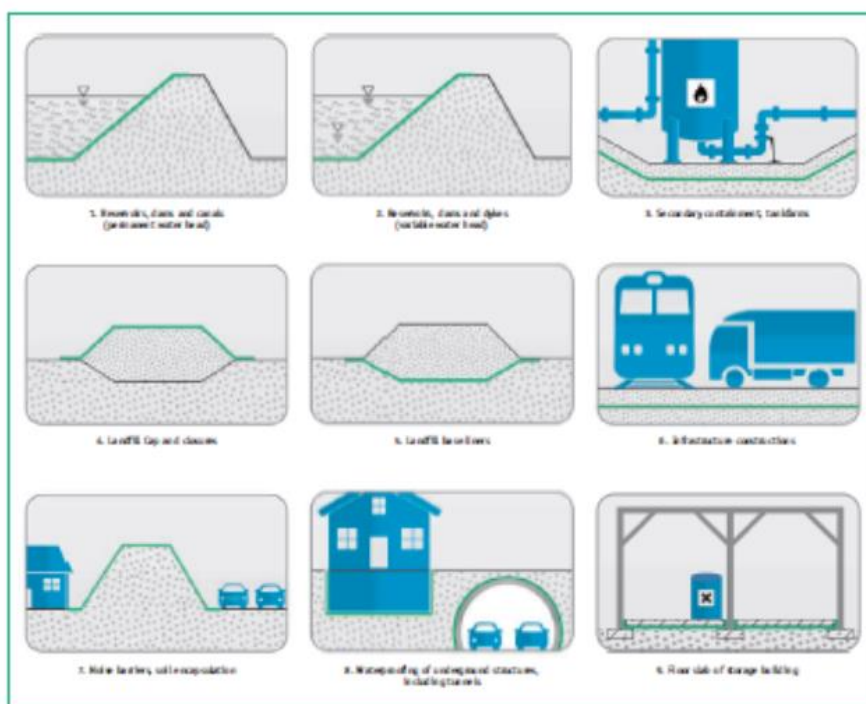

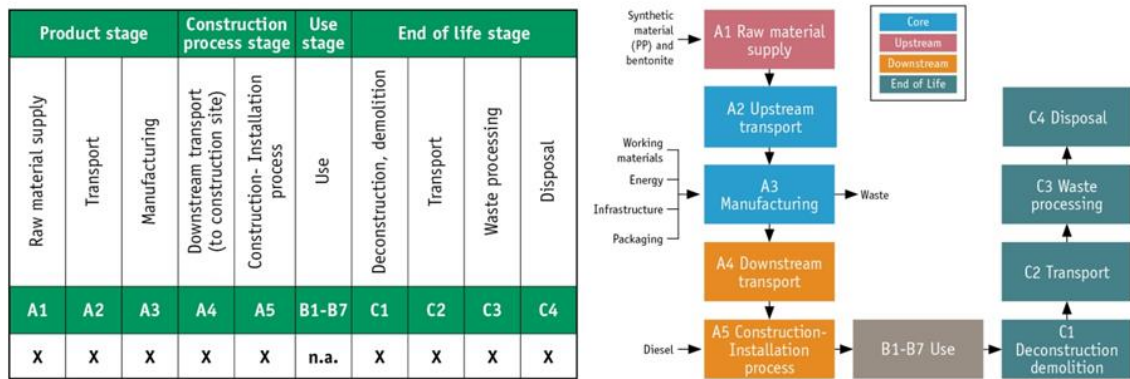


Fig. 2.1 Graphical overview of the life cycle stages covered by the EPD of geosynthetics

## 2.2 Raw material (A1)

The geosynthetic product Bentofix® is manufactured using polypropylene (PP) and bentonite as raw material. Occasionally, sand is used as an additional ballast material for underwater installation. The average geosynthetic clay liner for the Bentofix® product family consists of 89.8 % bentonite, 7.4 % PP, 1.6 % HDPE and 1.1 % sand. These shares describe the average production of the product family Bentofix® in the year 2019. More detailed information on the materials used is shown in Tab. 2.1.

## 2.3 Upstream transport (A2)

The transport to the manufacturer (A2) considers transports of raw materials to the Naue manufacturing site. The raw materials are transported from the producer to the Naue's production site by lorry. The average shipping distances for bentonite, sand and PP are 392 km, 161 km and 684 km, respectively.

## 2.4 Manufacturing (A3)

Manufacturing includes energy and working materials consumption, a share of the infrastructure (factory halls and office buildings) as well as disposal of production wastes (scrap, lubricating oil, and municipal waste). The manufacturing site is in Germany. Therefore, the German consumption mix at low voltage level is used to model the electricity use in manufacturing. The consumption mix displays the electricity domestic net production including imports. No secondary plastics are used. The production wastes are reported to be about 0.7 % relative to the material input.

## 2.5 Downstream transport (A4)

Transportation from the manufacturer to the construction site, warehouse or the client's location is considered based on the current sales of Naue. Shipping within Europe is done by lorry and to the rest of the world mainly by containers on freight ships. Containers are transported to port by lorry.

## 2.6 Construction and installation (A5)

The construction and installation stage considers the mounting of Bentofix®. Other processes such as excavation of foundation or ground compaction are outside the system boundary. The diesel consumption of mounting the geosynthetics amounts to 2.47 MJ/m².

Tab. 2.1 Specific raw material, working material and energy consumption, wastes produced and infrastructure requirements per square meter of average clay liner of the product family Bentofix®

| Specific material consumption                                     | Specific material and energy use per m² | Unit   | Bentofix® |
|-------------------------------------------------------------------|-----------------------------------------|--------|-----------|
| <b>Production volume and reference year</b>                       | Annual production volume                | tons   | *         |
|                                                                   | Annual production volume                | m²     | *         |
|                                                                   | Reference year                          |        | 2019      |
|                                                                   | Mass per unit area                      | g/m²   | 5'093     |
| <b>A1 Raw material</b>                                            | PP                                      | g/m²   | 388.1     |
|                                                                   | Polyethylene (HDPE)                     | g/m²   | 86.6      |
|                                                                   | Sodium bentonit                         | g/m²   | 4'693.9   |
|                                                                   | Sand                                    | g/m²   | 57.3      |
| <b>A2 Upstream transport</b>                                      | Lorry, 25 tons                          | tkm/m² | 2.11E+00  |
| <b>A3 Manufacturing (working material and energy consumption)</b> | <b>Working material</b>                 |        |           |
|                                                                   | Lubricating oil                         | kg/m²  | 1.99E-05  |
|                                                                   | <b>Packaging</b>                        |        |           |
|                                                                   | Paper case / cardboard                  | kg/m²  | 3.76E-03  |
|                                                                   | LLDPE (Packaging)                       | kg/m²  | 1.06E-02  |
|                                                                   | PVC                                     | kg/m²  | 8.71E-02  |
|                                                                   | Steelcore                               | kg/m²  | 8.07E-03  |
|                                                                   | <b>Energy</b>                           |        |           |
|                                                                   | Electricity                             | kWh/m² | 1.61E-01  |
|                                                                   | Diesel                                  | MJ/m²  | 2.15E-01  |
|                                                                   | Natural gas                             | MJ/m²  | 5.35E-01  |
|                                                                   | <b>Waste</b>                            |        |           |
|                                                                   | Municipal waste                         | kg/m²  | 9.66E-02  |
|                                                                   | Hazardous waste (machine oil)           | kg/m²  | 2.98E-05  |
|                                                                   | PP to Recycling                         | kg/m²  | 8.37E-03  |
|                                                                   | Bentonite to Recycling                  | kg/m²  | 2.79E-02  |
|                                                                   | <b>Land use</b>                         |        |           |
|                                                                   | Total area                              | m²/m²  | 3.85E-04  |
|                                                                   | factory halls                           | m²/m²  | 1.15E-04  |
|                                                                   | office buildings                        | m²/m²  | 9.79E-06  |
|                                                                   | other sealed area                       | m²/m²  | 2.18E-04  |
|                                                                   | share related to product                | %      | 3%        |
| <b>A4 Downstream transport</b>                                    | Ship                                    | tkm/m² | 2.98E+01  |
|                                                                   | Lorry, 25 tons                          | tkm/m² | 4.28E+00  |
| <b>A5 Construction and installation</b>                           | Diesel consumption installation         | MJ/m²  | 2.47E+00  |
| <b>C1 Deconstruction</b>                                          | Diesel consumption deconstruction       | MJ/m²  | 1.01E+01  |
| <b>C2 End-of-life transport</b>                                   | Lorry, 25 tons                          | tkm/m² | 1.08E-01  |

| Specific material consumption | Specific material and energy use per m <sup>2</sup> | Unit              | Bentofix® |
|-------------------------------|-----------------------------------------------------|-------------------|-----------|
| <b>C4 Disposal</b>            | Municipal waste incineration, Talcum/Bentonite      | kg/m <sup>2</sup> | 4.63E-01  |
|                               | Municipal waste incineration, PP                    | kg/m <sup>2</sup> | 3.78E-02  |
|                               | Municipal waste incineration, HDPE                  | kg/m <sup>2</sup> | 8.44E-03  |
|                               | Landfill, Talcum/Bentonite                          | kg/m <sup>2</sup> | 4.17E+00  |
|                               | Landfill, PP                                        | kg/m <sup>2</sup> | 3.40E-01  |
|                               | Landfill,HDPE                                       | kg/m <sup>2</sup> | 7.59E-02  |

\* filed confidentially \*\* tkm/m<sup>2</sup> - ton-kilometer per m<sup>2</sup>

## 2.7 Deconstruction (C1)

The deconstruction as part of the end-of-life processes (C1) covers the on-site dismantling of Bentofix®. The diesel consumption of dismantling the geosynthetics amounts to 10.1 MJ/m<sup>2</sup>.

## 2.8 Transport to product's waste processing (C2)

The end-of-life transports (C2) considers the transportation of the geosynthetics to a recycling site or disposal. On average, Bentofix® is transported 21 km to the nearest waste incineration plant or landfill.

## 2.9 Waste processing (C3)

Bentofix® is directly disposed of. That is why no wasted processing is included in the assessment.

## 2.10 Disposal (C4)

The end-of-life disposal (C4) includes the emissions from waste disposal, physical pre-treatment, and management of the disposal site. Bentofix® is disposed of 10 % in municipal waste incineration plants and 90 % in landfills.

## 3 LCA – Calculation rules

### 3.1 Declared Unit

The declared unit is 1 m<sup>2</sup> of clay liner of the product family Bentofix<sup>®</sup> with an average mass per unit area of 5.1 kg/m<sup>2</sup>.

### 3.2 System boundaries

This EPD is a cradle-to-grave declaration excluding the usage stage. The product system of geosynthetics comprises the product stage (manufacture and supply of raw materials including purchase and inter-company logistics, manufacture of the components and of the product), the construction stage (mounting of the product) and the end-of-life stage (deconstruction, end-of-life transport and disposal).

The comparison of products based on their EPD is defined by the contribution they make to the environmental performance of the building. Consequently, the comparison of the environmental performance of construction products using the EPD information shall be based on the product's use in and its impacts on the building and shall consider the complete life cycle (all information modules).

### 3.3 Allocation and recycling

Wastes that reach the end of waste state and that are recycled leave the product system without bearing a share of the environmental impacts of the first life cycle. No credits are given for potentially avoided production. Secondary raw materials bear environmental impacts caused by scrap collection and recycling activities. This is in line with the “polluter pays” principle (EN 15804, 2019; IES 2012).

Energy and working materials consumption as well as infrastructure requirements of Bentofix<sup>®</sup> manufacture are allocated according to the m<sup>2</sup> of the geosynthetics outputs.

### 3.4 Temporal and geographic validity

The life cycle assessment of Bentofix<sup>®</sup> describes the geosynthetics used worldwide. It is valid for the purchase, production, and distribution situation in the recent past (last two years). All product alternatives described in this report are currently available on the market.

### 3.5 Background data

Foreground inventory data is mainly based on average annual production data provided by Naue GmbH & Co. for the year 2019. The primary sources of background inventory data are the UVEK LCI data DQRv2:2018 (KBOB et al. 2018). These data are based on the ecoinvent data v2.2 (ecoinvent Centre 2010) and include updates of several background inventory data: electricity supply (Itten et al. 2014; Messmer & Frischknecht 2016a), natural gas supply (Schori et al. 2012), photovoltaics (Jungbluth et al. 2012; Frischknecht et al. 2015a), hydroelectric power generation (Flury & Frischknecht 2012), nuclear power and supply chain (Bauer et al. 2012), oil supply chain (Stolz & Frischknecht 2016a), wood products (Werner 2017), aluminium (Stolz & Frischknecht 2016b) and transportation (Stolz et al. 2016; Messmer & Frischknecht 2016b, c, d). The plastics inventory data of PET and PP refer to the years 1999/2000 and 1999, respectively and are based on data provided by PlasticsEurope (Boustead 2005-07).

The modelling and all calculations are performed with the LCA software SimaPro v9.1 (PRé Consultants 2020)

## 4 LCA – Results

LCIA results are relative expressions and do not predict impacts on category endpoints, the exceeding of thresholds, safety margins or risks. Impact Category indicators required by the environmental product declaration standard were modelled as follows:

- Climate change – total: Global Warming potential total (GWP-total), Baseline model of 100 years of the IPCC based on IPCC (2013)
- Ozone Depletion: Depletion potential of the stratospheric ozone layer (ODP), steady state ODPs (WMO 2015)
- Acidification: Acidification potential, Accumulated Exceedance (Seppälä et al. 2006, Posch et al. 2008)
- Eutrophication aquatic freshwater: Eutrophication potential, fraction of nutrients reaching freshwater end compartment (EP-freshwater), EUTREND model (Struijs et al. 2009)
- Eutrophication aquatic marine: Eutrophication potential, fraction of nutrients reaching marine end compartment (EP-marine): EUTREND model (Struijs et al. 2009)
- Eutrophication terrestrial: Eutrophication potential (EP-terrestrial), Accumulated Exceedance (Seppälä et al. 2006, Posch et al. 2008)
- Photochemical ozone formation: Formation potential of tropospheric ozone (POCP), LOTOS-EUROS (Van Zelm et al. 2008)
- Depletion of abiotic resources – minerals and metals<sup>1</sup>: Abiotic depletion potential for non-fossil resources (ADP-minerals&metals), CML 2002 (van Oers et al. 2002)

---

<sup>1</sup> The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experience with the indicator.

- Depletion of abiotic resources – fossil fuels<sup>1</sup>: Abiotic depletion potential for fossil resources (ADP-fossil), CML 2002 (van Oers et al. 2002)
- Water use<sup>1</sup>: Water (user) deprivation potential, deprivation weighted water consumption (WDP), Available WATER REmaining (AWARE, Boulay et al. 2017)
- Particulate Matter (PM) emissions: Potential incidence of disease due to PM emissions, SETAC-UNEP (Fantke et al. 2016)
- Ionising radiation, human health<sup>2</sup>: Potential Human exposure efficiency relative to U235 (IRP), Human health effect model as developed by Dreicer (1995) update by Frischknecht (2000)
- Ecotoxicity (freshwater)<sup>1</sup>: Potential Comparative Toxic Unit for ecosystems (ETP-fw), USEtox model (DG-JRC 2015)
- Human toxicity, cancer effects<sup>1</sup>: Potential Comparative Toxic Unit for humans (HTP-c), USEtox model (DG-JRC 2015)
- Human toxicity, non-cancer effects<sup>1</sup>: Potential Comparative Toxic Unit for humans (HTP-nc), USEtox model (DG-JRC 2015)
- Land use related impacts / soil quality<sup>1</sup>: Potential Soil quality index (SQP), soil quality index based on LANCA
- Use of renewable and non-renewable energy (cumulative energy demand, CED): reported in net calorific value, as demanded in the product declaration guidelines. For each the total and the two sub-categories “primary energy resources used as raw material” (feedstock) and “primary energy resources excluding use as raw material” are reported.
- The “CED, raw materials used” was assessed on product basis, i.e. the net calorific value of the materials contained in the geosynthetics
- The “CED total, renewable” and “CED total, non-renewable” are calculated with the method published in ecoinvent version 2.0 and expanded by PRé Consultants for resources available in SimaPro 9 database (Frischknecht et al. 2007; Frischknecht et al. 2015b; PRé Consultants 2015).
- Use of secondary materials: based on the feedstock used in the production of the geosynthetics
- Use of renewable secondary fuels and use of non-renewable secondary fuels. Electricity is assumed to contain no secondary fuels.
- Use of net fresh water: Evaporated water is considered with 100%; elementary flows in the background system are accounted for as follows: 10 % of water extracted from water bodies and 10 % of process water used (e.g. Water, lake; Water, process, drinking) and 5 % of cooling water used (e.g. water, cooling, surface).
- Waste, life cycle based: “Hazardous waste” covers hazardous waste deposited in underground storage facilities and is accounted for via the elementary flow of volume occupied in an underground deposit. The density of hazardous waste for the conversion to kg is taken from the ecoinvent report 13-III (Doka 2009).

---

<sup>2</sup> This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and from some construction materials is also not measured by this indicator.

“Radioactive waste” covers low radioactive waste and high and medium radioactive waste. It is assessed likewise via the elementary flows “volume occupied, final repository for Radioactive waste” and “volume occupied, final repository, low-active waste”, respectively. The density of radioactive waste is taken from Dones (Dones 2007). Non-hazardous waste covers all waste going to landfills. The conversion of the land transformation elementary flows “transformation, to dumpsite” for slag compartment (22’500 kg/m<sup>2</sup>), inert material landfill (22’500 kg/m<sup>2</sup>), sanitary landfill (20’000 kg/m<sup>2</sup>) and residual material landfill (16’000 kg/m<sup>2</sup>), is conducted according to the average depth of the landfill sites and average waste densities given in Doka (2007).

- Materials for recycling: based on the materials wasted in production, i.e. PET and PP sold to the recycling company. The production wastes are reported to be 0.69 % relative to the material input.
- Materials for energy recovery: weight of materials sent to municipal waste incineration plant, i.e. municipal waste.
- Long term emissions are not included in the assessment because of implausible results of the indicator eutrophication.

## 4.1 Life cycle impact assessment results

Tab. 4.1 Environmental impact caused by the production of 1 sqm of the average Bentofix®

| Environmental Impact<br>1 m <sup>2</sup> Bentofix® 5093 g/m <sup>2</sup> | Unit                              | A1 Raw material | A2 Upstream transport | A3 Manufacturing | A4 Downstream transport | A5 Construction and installation | C1 Deconstruction | C2 End-of-Life transport | C4 Disposal |
|--------------------------------------------------------------------------|-----------------------------------|-----------------|-----------------------|------------------|-------------------------|----------------------------------|-------------------|--------------------------|-------------|
| Climate Change - total                                                   | kg CO <sub>2</sub> -eq.           | 3.37E+00        | 2.64E-01              | 5.19E-01         | 7.42E-01                | 2.53E-01                         | 1.03E+00          | 1.35E-02                 | 2.40E-01    |
| Ozone Depletion                                                          | kg CFC-11-eq                      | 7.41E-07        | 1.39E-08              | 1.23E-08         | 3.45E-08                | 1.18E-08                         | 4.80E-08          | 7.13E-10                 | 6.76E-09    |
| Acidification (AP)                                                       | mol H <sup>+</sup> -eq            | 2.61E-02        | 1.15E-03              | 1.15E-03         | 9.32E-03                | 1.22E-03                         | 4.98E-03          | 5.89E-05                 | 3.67E-04    |
| Eutrophication aquatic freshwater                                        | kg P-eq                           | 5.44E-04        | 4.04E-06              | 1.81E-05         | 1.14E-05                | 1.60E-06                         | 6.52E-06          | 2.07E-07                 | 1.03E-06    |
| Eutrophication aquatic marine                                            | kg N-eq                           | 2.29E-03        | 2.72E-04              | 2.69E-04         | 2.28E-03                | 3.93E-04                         | 1.60E-03          | 1.39E-05                 | 1.06E-04    |
| Eutrophication terrestrial                                               | mol N-eq                          | 2.70E-02        | 3.00E-03              | 2.93E-03         | 2.53E-02                | 4.32E-03                         | 1.76E-02          | 1.54E-04                 | 1.07E-03    |
| Photochemical ozone formation                                            | kg NMVOC-eq                       | 1.06E-02        | 1.03E-03              | 1.31E-03         | 7.00E-03                | 1.28E-03                         | 5.21E-03          | 5.28E-05                 | 3.71E-04    |
| Depletion of abiotic resources - minerals and metals                     | kg Sb-eq                          | 9.91E-06        | 6.19E-07              | 3.55E-07         | 1.27E-06                | 6.43E-08                         | 2.62E-07          | 3.17E-08                 | 7.67E-08    |
| Depletion of abiotic resources - fossil fuels                            | MJ oil-eq                         | 8.50E+01        | 4.10E+00              | 8.59E+00         | 1.13E+01                | 3.45E+00                         | 1.41E+01          | 2.10E-01                 | 1.56E+00    |
| Water use                                                                | m <sup>3</sup> world eq. deprived | 6.61E-01        | 6.40E-03              | 1.09E-01         | 1.75E-02                | 2.96E-03                         | 1.21E-02          | 3.28E-04                 | 7.02E-03    |
| Particulate matter emissions                                             | disease incidence                 | 2.11E-07        | 1.94E-08              | 9.63E-09         | 4.54E-08                | 6.26E-09                         | 2.55E-08          | 9.94E-10                 | 4.03E-09    |
| Ionising radiation, human health                                         | kBq U235-eq                       | 1.97E-01        | 6.71E-03              | 1.26E-02         | 2.20E-02                | 2.61E-03                         | 1.06E-02          | 3.44E-04                 | 3.06E-03    |
| Ecotoxicity (freshwater)                                                 | CTUe                              | 3.69E+01        | 3.00E+00              | 3.63E+00         | 7.86E+00                | 2.08E+00                         | 8.47E+00          | 1.54E-01                 | 9.56E-01    |
| Human toxicity, cancer effects                                           | CTUh                              | 1.32E-09        | 8.17E-11              | 2.65E-10         | 2.25E-10                | 1.38E-10                         | 5.64E-10          | 4.18E-12                 | 4.11E-11    |
| Human toxicity, non-cancer effects                                       | CTUh                              | 1.54E-07        | 4.58E-09              | 6.42E-09         | 1.06E-08                | 3.03E-09                         | 1.24E-08          | 2.34E-10                 | 1.28E-09    |
| Land use related impacts / soil quality                                  | -                                 | 6.12E+01        | 7.81E-01              | 1.10E+00         | 1.99E+00                | 3.77E-01                         | 1.54E+00          | 4.00E-02                 | 2.82E+00    |

Tab. 4.2 Cumulative energy demand and energy use caused by the production of 1 sqm of the average Bentofix®

| Energy demand<br>1 m <sup>2</sup> Bentofix® 5093 g/m <sup>2</sup> | Unit      | A1 Raw material | A2 Upstream transport | A3 Manufacturing | A4 Downstream transport | A5 Construction and installation | C1 Deconstruction | C2 End-of-Life transport | C4 Disposal |
|-------------------------------------------------------------------|-----------|-----------------|-----------------------|------------------|-------------------------|----------------------------------|-------------------|--------------------------|-------------|
| CED, non-renewable, total                                         | MJ oil-eq | 8.50E+01        | 4.09E+00              | 8.56E+00         | 1.12E+01                | 3.45E+00                         | 1.41E+01          | 2.09E-01                 | 1.56E+00    |
| CED, non-ren., w/o raw mat. use                                   | MJ oil-eq | 7.24E+01        | 4.09E+00              | 6.37E+00         | 1.12E+01                | 3.45E+00                         | 1.41E+01          | 2.09E-01                 | 1.56E+00    |
| CED, non-ren., raw mat. use                                       | MJ oil-eq | 1.26E+01        | 0.00E+00              | 2.20E+00         | 0.00E+00                | 0.00E+00                         | 0.00E+00          | 0.00E+00                 | 0.00E+00    |
| CED, renewable, total                                             | MJ oil-eq | 2.43E+00        | 6.75E-02              | 4.19E-01         | 2.07E-01                | 2.60E-02                         | 1.06E-01          | 3.46E-03                 | 3.15E-02    |
| CED, renew., w/o raw material use                                 | MJ oil-eq | 2.43E+00        | 6.75E-02              | 4.19E-01         | 2.07E-01                | 2.60E-02                         | 1.06E-01          | 3.46E-03                 | 3.15E-02    |
| CED, renew., raw material use                                     | MJ oil-eq | 0.00E+00        | 0.00E+00              | 0.00E+00         | 0.00E+00                | 0.00E+00                         | 0.00E+00          | 0.00E+00                 | 0.00E+00    |
| Use of renewable secondary fuels                                  | MJ oil-eq | 0.00E+00        | 0.00E+00              | 0.00E+00         | 0.00E+00                | 0.00E+00                         | 0.00E+00          | 0.00E+00                 | 0.00E+00    |
| Use of non-renewable secondary fuels                              | MJ oil-eq | 0.00E+00        | 0.00E+00              | 0.00E+00         | 0.00E+00                | 0.00E+00                         | 0.00E+00          | 0.00E+00                 | 0.00E+00    |
| Use of electricity                                                | MJ        | 0.00E+00        | 0.00E+00              | 5.79E-01         | 0.00E+00                | 0.00E+00                         | 0.00E+00          | 0.00E+00                 | 0.00E+00    |

Tab. 4.3 Material use and waste flows caused by the production of 1 sqm of the average Bentofix®

| Material use<br>1 m <sup>2</sup> Bentofix® 5093 g/m <sup>2</sup> | Unit           | A1 Raw material | A2 Upstream transport | A3 Manufacturing | A4 Downstream transport | A5 Construction and installation | C1 Deconstruction | C2 End-of-Life transport | C4 Disposal |
|------------------------------------------------------------------|----------------|-----------------|-----------------------|------------------|-------------------------|----------------------------------|-------------------|--------------------------|-------------|
| Use of net fresh water                                           | m <sup>3</sup> | 1.64E-02        | 1.80E-04              | 2.64E-03         | 5.06E-04                | 8.11E-05                         | 3.31E-04          | 9.21E-06                 | 1.76E-04    |
| Hazardous waste                                                  | kg             | 5.32E-02        | 5.01E-06              | 6.89E-06         | 1.14E-05                | 1.54E-06                         | 6.28E-06          | 2.57E-07                 | 1.00E-06    |
| Non-hazardous waste                                              | kg             | 6.34E-01        | 3.15E-02              | 4.18E-02         | 6.60E-02                | 4.01E-03                         | 1.63E-02          | 1.62E-03                 | 5.13E+00    |
| Radioactive waste                                                | kg             | 1.64E-04        | 4.70E-06              | 1.40E-05         | 1.58E-05                | 1.94E-06                         | 7.91E-06          | 2.41E-07                 | 2.10E-06    |
| Use of material                                                  | kg             | 5.23E+00        | 0.00E+00              | 1.18E-01         | 0.00E+00                | 0.00E+00                         | 0.00E+00          | 0.00E+00                 | 0.00E+00    |
| Use of renewable material                                        | kg             | 0.00E+00        | 0.00E+00              | 0.00E+00         | 0.00E+00                | 0.00E+00                         | 0.00E+00          | 0.00E+00                 | 0.00E+00    |
| Use of secondary material                                        | kg             | 0.00E+00        | 0.00E+00              | 0.00E+00         | 0.00E+00                | 0.00E+00                         | 0.00E+00          | 0.00E+00                 | 0.00E+00    |
| Use of renewable secondary material                              | kg             | 0.00E+00        | 0.00E+00              | 0.00E+00         | 0.00E+00                | 0.00E+00                         | 0.00E+00          | 0.00E+00                 | 0.00E+00    |
| Components for re-use                                            | kg             | 0.00E+00        | 0.00E+00              | 0.00E+00         | 0.00E+00                | 0.00E+00                         | 0.00E+00          | 0.00E+00                 | 0.00E+00    |
| Materials for recycling                                          | kg             | 0.00E+00        | 0.00E+00              | 3.63E-02         | 0.00E+00                | 0.00E+00                         | 0.00E+00          | 0.00E+00                 | 0.00E+00    |
| Materials for energy recovery                                    | kg             | 0.00E+00        | 0.00E+00              | 9.66E-02         | 0.00E+00                | 0.00E+00                         | 0.00E+00          | 0.00E+00                 | 0.00E+00    |

## 4.2 Relative contribution of life cycle stages

Fig. 4.1 shows the relative contribution of the different life cycle stages (A1 – A5) to the total impact of the product and construction process stage A of Bentofix<sup>®</sup> clay liners. The contribution is shown for the ten core indicators: Climate Change – total, Ozone Depletion, Acidification (AP), Eutrophication aquatic freshwater, Eutrophication aquatic marine, Eutrophication terrestrial, Photochemical ozone formation, Depletion of abiotic resources – minerals and metals, Depletion of abiotic resources – fossil fuels. According to the EPD of 2017 (NAUE 2017) and for comparison purposes, the end of life stage C is not included in Fig. 4.1.

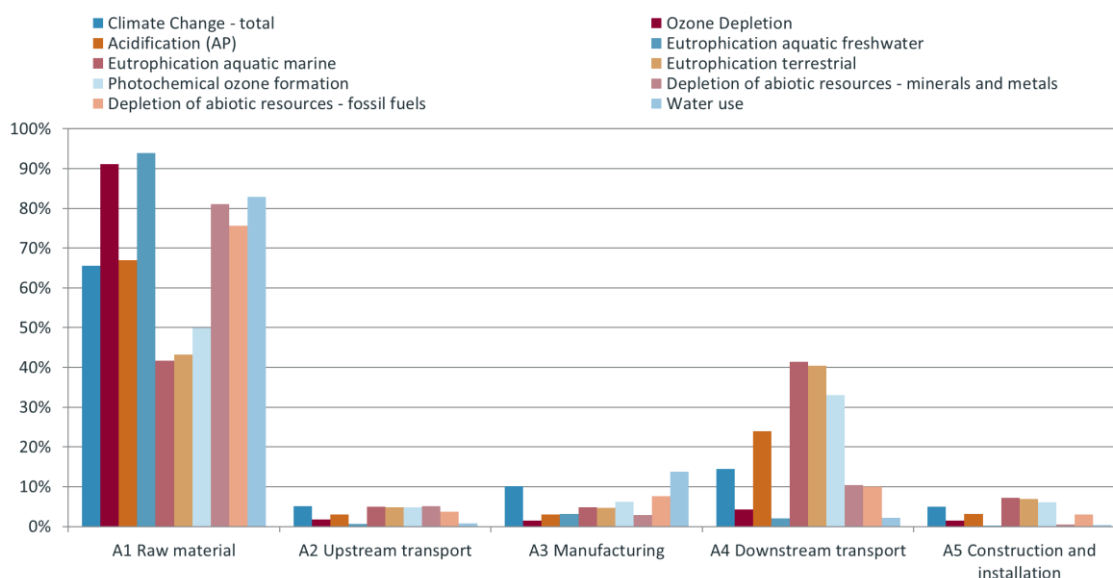


Fig. 4.1 Relative contribution of the different life cycle stages (A1 – A5) to the total impact of the product and construction process stage A of Bentofix<sup>®</sup>

## 4.3 Data quality

The quality of the data used to model geosynthetics produced by Naue GmbH & Co. KG is high regarding the material composition, the transport logistics and the manufacture of component. Data are provided by Naue GmbH & Co. KG and are reliable and detailed. The manufacturer's data are less than three years old and based on annual averages. The data representing the end of life stage are mainly based on assumptions and thus the data quality is considered to be low. The material supply of plastics is represented by best available data provided by the European Plastics association PlasticsEurope.

The UVEK LCI data DQRv2:2018 (KBOB et al. 2018) are used as background inventory data to complement the product system of geosynthetics. The UVEK LCI data DQRv2:2018 are based on the ecoinvent data v2.2 (ecoinvent Centre 2010) and contain inventory data of many basic materials and services. The database includes the most recent datasets of plastic feedstock. Most of the important background data are less than 10 years old.

Additional data quality considerations are documented within the KBOB LCI and ecoinvent database. A Monte Carlo analysis to assess uncertainties was not conducted. The overall background data quality is appropriate for the use in this LCA.

## 5 Environmental impacts according to the NMD method

The following table and figure is an extension to the Environmental Product Declaration of Bentofix<sup>®</sup>, evaluating the impacts following the Nationale Milieu Database (NMD) method. The potential benefits and loads are due to district heat and electricity by MSWI of 10 % of the geosynthetic materials.

Tab. 5.1 Environmental impacts (EN 15804:2012+A2:2019) caused by the production and disposal of 1 sqm of the average Bentofix<sup>®</sup>

| Environmental Impact<br>1 m2 Bentofix * 5093 g/m2   | Unit                   | A1 Raw material | A2 Upstream transport | A3 Manufacturing | A4 Downstream transport | A5 Construction and installation | C1 Deconstruction | C2 End of Life transport | C4 Disposal | D Benefits and loads beyond the system boundary |
|-----------------------------------------------------|------------------------|-----------------|-----------------------|------------------|-------------------------|----------------------------------|-------------------|--------------------------|-------------|-------------------------------------------------|
| ClimateChange-total                                 | kgCO <sub>2</sub> -eq. | 3.37E+00        | 2.64E-01              | 5.19E-01         | 7.42E-01                | 2.53E-01                         | 1.03E+00          | 1.35E-02                 | 2.40E-01    | -5.10E-02                                       |
| Climatechange-Fossil                                | kgCO <sub>2</sub> -eq. | 3.37E+00        | 2.64E-01              | 4.51E-01         | 7.42E-01                | 2.53E-01                         | 1.03E+00          | 1.35E-02                 | 2.40E-01    | -5.10E-02                                       |
| Climatechange-Biogenic                              | kgCO <sub>2</sub> -eq. | 7.38E-03        | -4.31E-05             | 6.76E-02         | -8.13E-05               | -1.90E-05                        | -7.76E-05         | -2.21E-06                | 3.25E-04    | -1.03E-05                                       |
| Climatechange-Land use and LUchange                 | kgCO <sub>2</sub> -eq. | 5.18E-04        | 1.76E-05              | 5.16E-05         | 5.64E-05                | 6.97E-06                         | 2.84E-05          | 9.04E-07                 | 6.95E-06    | -1.59E-05                                       |
| Ozone Depletion                                     | kgCFC-11-eq.           | 7.41E-07        | 1.39E-08              | 1.23E-08         | 3.45E-08                | 1.18E-08                         | 4.80E-08          | 7.13E-10                 | 6.76E-09    | -5.31E-09                                       |
| Acidification (AP)                                  | molH <sup>+</sup> -eq. | 2.61E-02        | 1.15E-03              | 1.15E-03         | 9.32E-03                | 1.22E-03                         | 4.98E-03          | 5.89E-05                 | 3.67E-04    | -1.33E-04                                       |
| Eutrophication aquatic freshwater                   | kgP-eq.                | 5.44E-04        | 4.04E-06              | 1.81E-05         | 1.14E-05                | 1.60E-06                         | 6.52E-06          | 2.07E-07                 | 1.03E-06    | -2.35E-06                                       |
| Eutrophication aquatic marine                       | kgN-eq.                | 2.29E-03        | 2.72E-04              | 2.69E-04         | 2.28E-03                | 3.93E-04                         | 1.60E-03          | 1.39E-05                 | 1.06E-04    | -1.94E-05                                       |
| Eutrophication terrestrial                          | molN-eq.               | 2.70E-02        | 3.00E-03              | 2.93E-03         | 2.53E-02                | 4.32E-03                         | 1.76E-02          | 1.54E-04                 | 1.07E-03    | -2.16E-04                                       |
| Photochemical ozone formation                       | kgNMVOC-eq.            | 1.06E-02        | 1.03E-03              | 1.31E-03         | 7.00E-03                | 1.28E-03                         | 5.21E-03          | 5.28E-05                 | 3.71E-04    | -6.90E-05                                       |
| Depletion of abiotic resources- minerals and metals | kgSb-eq.               | 9.91E-06        | 6.19E-07              | 3.55E-07         | 1.27E-06                | 6.43E-08                         | 2.62E-07          | 3.17E-08                 | 7.67E-08    | -6.28E-09                                       |
| Depletion of abiotic resources- fossil fuels        | MJ oil-eq.             | 8.50E+01        | 4.10E+00              | 8.59E+00         | 1.13E+01                | 8.45E+00                         | 1.41E+01          | 2.10E+01                 | 1.56E+00    | -8.58E-01                                       |
| Water use                                           | m3 deprived            | 6.61E-01        | 6.40E-03              | 1.09E-01         | 1.75E-02                | 2.96E-03                         | 1.21E-02          | 3.28E-04                 | 7.02E-03    | -2.52E-03                                       |
| Particulate matter emissions                        | dis. incid.            | 2.11E-07        | 1.94E-08              | 9.63E-09         | 4.54E-08                | 6.26E-09                         | 2.55E-08          | 9.94E-10                 | 4.03E-09    | -3.97E-10                                       |
| Ionising radiation, human health                    | kBq U235-eq.           | 1.97E-01        | 6.71E-03              | 1.26E-02         | 2.20E-02                | 2.61E-03                         | 1.06E-02          | 3.44E-04                 | 3.06E-03    | -6.57E-03                                       |
| Ecotoxicity (freshwater)                            | CTUe                   | 3.69E+01        | 3.00E+00              | 3.63E+00         | 7.86E+00                | 2.08E+00                         | 8.47E+00          | 1.54E+01                 | 9.56E+01    | -2.27E-01                                       |
| Human toxicity, cancer effects                      | CTUh                   | 1.32E-09        | 8.17E-11              | 2.65E-10         | 2.25E-10                | 1.38E-10                         | 5.64E-10          | 4.18E-12                 | 4.11E-11    | -6.54E-12                                       |
| Human toxicity, non-cancer effects                  | CTUh                   | 1.54E-07        | 4.58E-09              | 6.42E-09         | 1.06E-08                | 3.03E-09                         | 1.24E-08          | 2.34E-10                 | 1.28E-09    | -1.83E-10                                       |
| Land use related impacts/ soil quality              | -                      | 6.12E+01        | 7.81E-01              | 1.10E+00         | 1.99E+00                | 3.77E+01                         | 1.54E+00          | 4.00E-02                 | 2.82E+00    | -3.03E-02                                       |

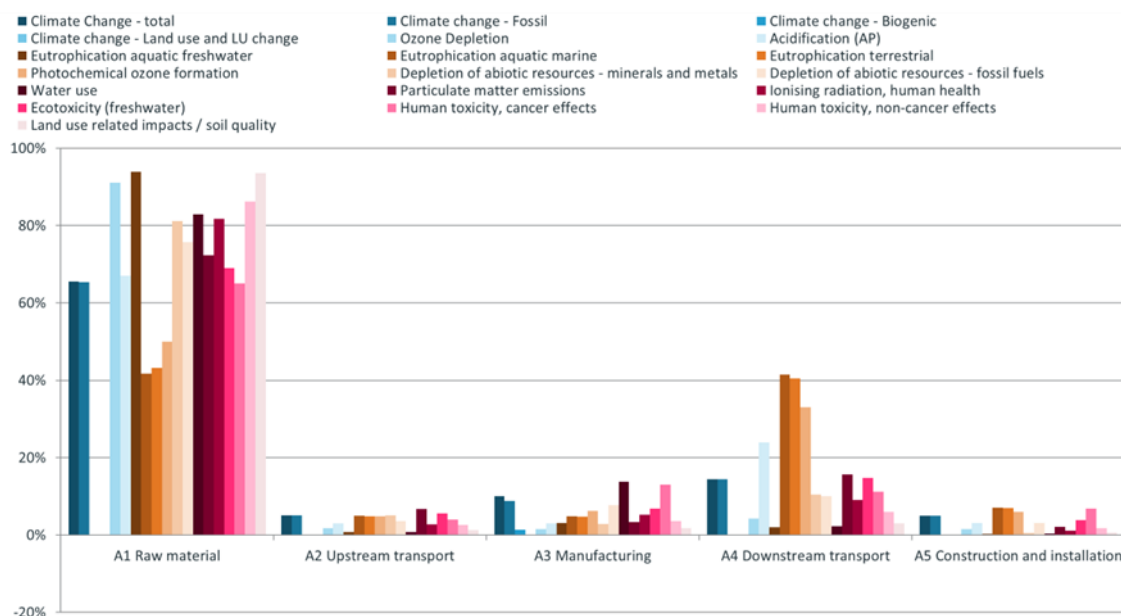


Fig. 5.1 Relative contribution of the different life cycle stages (A1 – A5) to the total impact of the product and construction process stage A of Bentofix®

## 6 Milieukostenindicator, The Netherlands

Tab. 6.1 Environmental impacts (EN 15804:2012+A1:2013) caused by the production of 1 sqm of the average Bentofix®

| Environmental Impact<br>1 m <sup>2</sup> Bentofix® 5093 g/m <sup>2</sup> | Unit                                | A1 Raw material | A2 Upstream transport | A3 Manufacturing | A4 Downstream transport | A5 Construction and installation | C1 Deconstruction | C2 End-of-Life transport | C4 Disposal | D Benefits and loads |
|--------------------------------------------------------------------------|-------------------------------------|-----------------|-----------------------|------------------|-------------------------|----------------------------------|-------------------|--------------------------|-------------|----------------------|
| Abiotic depletion                                                        | kg Sb eq                            | 9.93E-06        | 6.19E-07              | 3.59E-07         | 1.27E-06                | 6.45E-08                         | 2.63E-07          | 3.17E-08                 | 7.69E-08    | -6.78E-09            |
| Abiotic depletion (fossil fuels)                                         | kg Sb eq                            | 4.05E-02        | 1.90E-03              | 3.82E-03         | 5.19E-03                | 1.64E-03                         | 6.67E-03          | 9.72E-05                 | 7.13E-04    | -3.89E-04            |
| Global warming (GWP100a)                                                 | kg CO <sub>2</sub> eq               | 3.26E+00        | 2.60E-01              | 4.44E-01         | 7.32E-01                | 2.50E-01                         | 1.02E+00          | 1.33E-02                 | 2.31E-01    | -5.02E-02            |
| Ozone layer depletion (ODP)                                              | kg CFC-11 eq                        | 7.47E-07        | 1.30E-08              | 1.19E-08         | 3.17E-08                | 9.53E-09                         | 3.88E-08          | 6.67E-10                 | 5.74E-09    | -4.80E-09            |
| Photochemical oxidation                                                  | kg C <sub>2</sub> H <sub>4</sub> eq | 1.23E-03        | 4.74E-05              | 5.75E-05         | 2.44E-04                | 4.68E-05                         | 1.91E-04          | 2.43E-06                 | 2.36E-05    | -6.27E-06            |
| Acidification                                                            | kg SO <sub>2</sub> eq               | 2.26E-02        | 9.26E-04              | 9.28E-04         | 7.46E-03                | 9.38E-04                         | 3.83E-03          | 4.74E-05                 | 2.91E-04    | -1.12E-04            |
| Eutrophication                                                           | kg PO <sub>4</sub> --- eq           | 2.65E-03        | 1.43E-04              | 1.65E-04         | 9.11E-04                | 1.68E-04                         | 6.84E-04          | 7.31E-06                 | 5.27E-05    | -1.44E-05            |
| Human toxicity                                                           | kg 1,4-DB eq                        | 1.00E+00        | 8.53E-02              | 8.63E-02         | 2.46E-01                | 2.65E-02                         | 1.08E-01          | 4.37E-03                 | 2.48E-02    | -3.12E-03            |
| Fresh water aquatic ecotox.                                              | kg 1,4-DB eq                        | 1.95E-02        | 3.28E-03              | 4.24E-03         | 8.62E-03                | 1.85E-03                         | 7.56E-03          | 1.68E-04                 | 5.99E-03    | -1.04E-04            |
| Marine aquatic ecotoxicity                                               | kg 1,4-DB eq                        | 6.17E+02        | 2.76E+01              | 9.01E+01         | 9.90E+01                | 1.36E+01                         | 5.54E+01          | 1.41E+00                 | 1.39E+01    | -1.29E+01            |
| Terrestrial ecotoxicity                                                  | kg 1,4-DB eq                        | 1.07E-02        | 5.56E-04              | 1.21E-03         | 1.51E-03                | 3.43E-04                         | 1.40E-03          | 2.85E-05                 | 1.45E-04    | -2.70E-05            |

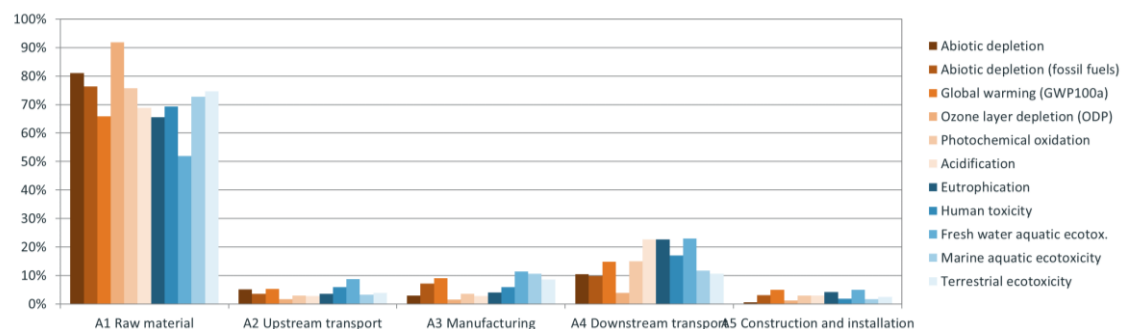


Fig. 6.1: Relative contribution of the different life cycle stages (A1 – A5) to the total environmental impacts of the product and construction process stage A of Bentofix®

Tab. 6.2 Environmental external costs (in EURO) caused by the production and disposal of 1 square meter of the average Bentofix®

| NMD Bepalingsmethode, in EURO<br>1 m <sup>2</sup> Bentofix® 5093 g/m <sup>2</sup> | A1 Raw material | A2 Upstream transport | A3 Manufacturing | A4 Downstream transport | A5 Construction and installation | C1 Deconstruction | C2 End-of-Life transport | C4 Disposal | D Benefits and Loads | Total |
|-----------------------------------------------------------------------------------|-----------------|-----------------------|------------------|-------------------------|----------------------------------|-------------------|--------------------------|-------------|----------------------|-------|
| Abiotic depletion                                                                 | 0.00            | 0.00                  | 0.00             | 0.00                    | 0.00                             | 0.00              | 0.00                     | 0.00        | 0.00                 | 0.00  |
| Abiotic depletion (fossil fuels)                                                  | 0.01            | 0.00                  | 0.00             | 0.00                    | 0.00                             | 0.00              | 0.00                     | 0.00        | 0.00                 | 0.01  |
| Global warming (GWP100a)                                                          | 0.16            | 0.01                  | 0.02             | 0.04                    | 0.01                             | 0.05              | 0.00                     | 0.01        | 0.00                 | 0.31  |
| Ozone layer depletion (ODP)                                                       | 0.00            | 0.00                  | 0.00             | 0.00                    | 0.00                             | 0.00              | 0.00                     | 0.00        | 0.00                 | 0.00  |
| Photochemical oxidation                                                           | 0.00            | 0.00                  | 0.00             | 0.00                    | 0.00                             | 0.00              | 0.00                     | 0.00        | 0.00                 | 0.00  |
| Acidification                                                                     | 0.09            | 0.00                  | 0.00             | 0.03                    | 0.00                             | 0.02              | 0.00                     | 0.00        | 0.00                 | 0.15  |
| Eutrophication                                                                    | 0.02            | 0.00                  | 0.00             | 0.01                    | 0.00                             | 0.01              | 0.00                     | 0.00        | 0.00                 | 0.04  |
| Human toxicity                                                                    | 0.09            | 0.01                  | 0.01             | 0.02                    | 0.00                             | 0.01              | 0.00                     | 0.00        | 0.00                 | 0.14  |
| Fresh water aquatic ecotox.                                                       | 0.00            | 0.00                  | 0.00             | 0.00                    | 0.00                             | 0.00              | 0.00                     | 0.00        | 0.00                 | 0.00  |
| Marine aquatic ecotoxicity                                                        | 0.06            | 0.00                  | 0.01             | 0.01                    | 0.00                             | 0.01              | 0.00                     | 0.00        | 0.00                 | 0.09  |
| Terrestrial ecotoxicity                                                           | 0.00            | 0.00                  | 0.00             | 0.00                    | 0.00                             | 0.00              | 0.00                     | 0.00        | 0.00                 | 0.00  |
| Total                                                                             | 0.44            | 0.03                  | 0.05             | 0.11                    | 0.02                             | 0.09              | 0.00                     | 0.02        | 0.00                 | 0.75  |

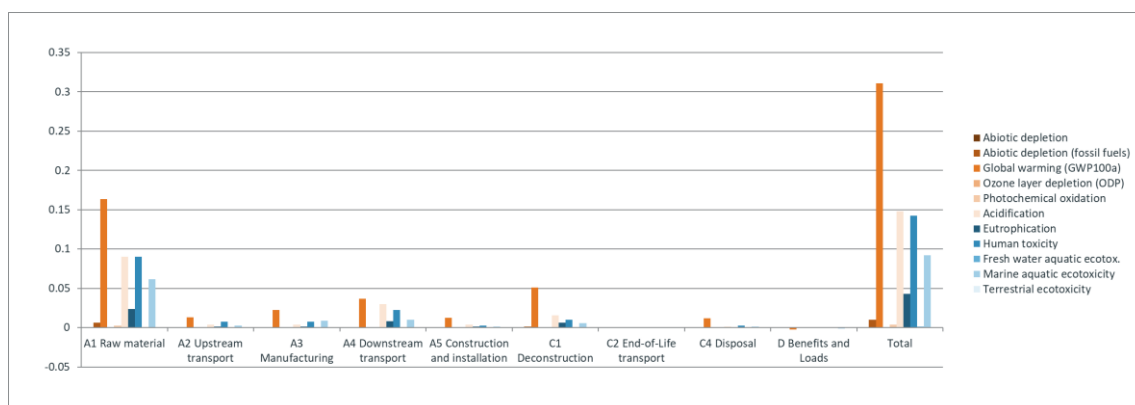


Fig. 6.2: Environmental external costs of the different life cycle stages (A1 – A5, C1 – C4, D, and Total, excluding D) of the manufacture and disposal of 1 m<sup>2</sup> average Bentofix®

## 7 References

- Bauer C., Frischknecht R., Eckle P., Flury K., Neal T., Papp K., Schori S., Simons A., Stucki M. and Treyer K. (2012) Umweltauswirkungen der Stromerzeugung in der Schweiz. ESU-services Ltd & Paul Scherrer Institute im Auftrag des Bundesamts für Energie BFE, Uster & Villigen.
- Boulay A.-M., Bare J., Benini L., Berger M., Lathuillière M., Manzardo A., Margni M., Motoshita M., Núñez M., Pastor A. V., Ridoutt B., Oki T., Worbe S. and Pfister S. (2017) The WULCA consensus characterization model for water scarcity footprints: assessing impacts of water consumption based on Available Water REMaining (AWARE). In: The International Journal of Life Cycle Assessment, pp. 1-11, 10.1007/s11367-017-1333-8.
- Boustead I. (2005-07) Electronic documents with the datasets from the PlasticsEurope Eco-Profiles - Calculation results from March 2005. PlasticsEurope, retrieved from: <http://www.plasticseurope.org>.
- DG-JRC (2015) Executive summary of 'Current and future implementability of USEtox' PEF meeting, Final version May 2015. Institute for Environment and Sustainability, Joint Research Centre, European Commission, Ispra.
- Doka G. (2007) Life Cycle Inventories of Waste Treatment Services. ecoinvent report No. 13, v2.0. EMPA St. Gallen, Swiss Centre for Life Cycle Inventories, Dübendorf, CH, retrieved from: [www.ecoinvent.org](http://www.ecoinvent.org).

- Doka G. (2009) Life Cycle Inventories of Waste Treatment Services. ecoinvent report No. 13, v2.1. EMPA St. Gallen, Swiss Centre for Life Cycle Inventories, Dübendorf, CH, retrieved from: [www.ecoinvent.org](http://www.ecoinvent.org).
- Dones R. (2007) Kernenergie. In: Sachbilanzen von Energiesystemen: Grundlagen für den ökologischen Vergleich von Energiesystemen und den Einbezug von Energiesystemen in Ökobilanzen für die Schweiz, Vol. ecoinvent report No. 6-VII, v2.0 (Ed. Dones R.). Paul Scherrer Institut Villigen, Swiss Centre for Life Cycle Inventories, Dübendorf, CH retrieved from: [www.ecoinvent.org](http://www.ecoinvent.org).
- Dreicer M., Tort V. and Manen P. (1995) ExternE, Externalities of Energy. Vol. Vol. 5 Nuclear (ed. European Commission DGXII S., Research and development JOULE). Centre d'étude sur l'Evaluation de la Protection dans le domaine nucléaire (CEPN), Luxembourg.
- ecoinvent Centre (2010) ecoinvent data v2.2, ecoinvent reports No. 1-25. Swiss Centre for Life Cycle Inventories, Dübendorf, Switzerland, retrieved from: [www.ecoinvent.org](http://www.ecoinvent.org).
- EN 15804 (2013) EN 15804:2012+A1:2013 - Sustainability of construction works - Environmental product declarations - Core rules for the product category of construction products. European Committee for Standardisation (CEN), Brussels.
- EN 15804 (2019) EN 15804:2012+A2:2019 - Sustainability of construction works - Environmental product declarations - Core rules for the product category of construction products. European Committee for Standardisation (CEN), Brussels.
- Fantke P., Evans J. S., Hodas N., Apte J. S., Jantunen M. J., Jolliet O. and McKone T. E. (2016) Health impacts of fine particulate matter. In: Global Guidance for Life Cycle Impact Assessment Indicators. UNEP, Paris.
- Flury & Frischknecht 2012 Flury K. and Frischknecht R. (2012) Life Cycle Inventories of Hydroelectric Power Generation. ESU-services Ltd., Uster, retrieved from: [www.lc-inventories.ch](http://www.lc-inventories.ch).
- Frischknecht R., Braunschweig A., Hofstetter P. and Suter P. (2000) Human Health Damages due to Ionising Radiation in Life Cycle Impact Assessment. In: Review Environmental Impact Assessment, 20(2), pp. 159-189.
- Frischknecht R., Althaus H.-J., Dones R., Hirschler R., Jungbluth N., Nemecek T., Primas A. and Wernet G. (2007) Renewable Energy Assessment within the Cumulative Energy Demand Concept: Challenges and Solutions. In proceedings from: SETAC Europe 14th LCA case study symposium: Energy in LCA - LCA of Energy, 3-4 December 2007, Gothenburg, Sweden.
- Frischknecht R., Itten R., Sinha P., de Wild Scholten M., Zhang J., Fthenakis V., Kim H. C., Raugei M. and Stucki M. (2015a) Life Cycle Inventories and Life Cycle Assessments of Photovoltaic Systems. International Energy Agency (IEA) PVPS Task 12.
- Frischknecht R., Wyss F., Büsser Knöpfel S., Lützkendorf T. and Balouktsi M. (2015b) Cumulative energy demand in LCA: the energy harvested approach. In: The International Journal of Life Cycle Assessment, 20(7), pp. 957-969, 10.1007/s11367-015-0897-4, retrieved from: <http://dx.doi.org/10.1007/s11367-015-0897-4>.
- IES (2012) Product Category Rules and PCR Basic Module. International EPD System (IES), retrieved from: [www.environdec.com](http://www.environdec.com).
- IES (2018) Product Category Rules (PCR) Construction Products and Construction Services, 2012:01, Version 2.3. International EPD System (IES), Stockholm, Sweden, retrieved from: [www.environdec.com](http://www.environdec.com).
- IPCC (2013) The IPCC fifth Assessment Report - Climate Change 2013: the Physical Science Basis. Working Group I, IPCC Secretariat, Geneva, Switzerland.
- Itten R., Frischknecht R. and Stucki M. (2014) Life Cycle Inventories of Electricity Mixes and Grid, Version 1.3. treeze Ltd., Uster, Switzerland, retrieved from: [www.treeze.ch](http://www.treeze.ch).
- Jungbluth N., Stucki M., Flury K., Frischknecht R. and Buesser S. (2012) Life Cycle Inventories of Photovoltaics. ESU-services Ltd., Uster, CH, retrieved from: [www.esu-services.ch](http://www.esu-services.ch).
- KBOB, eco-bau and IPB (2018) UVEK Ökobilanzdatenbestand DQRv2:2018. Koordinationskonferenz der Bau- und Liegenschaftsorgane der öffentlichen Bauherren c/o BBL Bundesamt für Bauten und Logistik, retrieved from: [www.ecoinvent.org](http://www.ecoinvent.org).
- Messmer A. and Frischknecht R. (2016a) Umweltbilanz Strommix Schweiz 2014. treeze Ltd., Uster.
- Messmer A. and Frischknecht R. (2016b) Life Cycle Inventories of Air Transport Services. treeze Ltd., Uster.

- Messmer A. and Frischknecht R. (2016c) Life Cycle Inventories of Water Transport Services. treeze Ltd., Uster.
- Messmer A. and Frischknecht R. (2016d) Life cycle inventories of rail transport services. treeze Ltd., Uster.
- NAUE (2017) Environmental Product Declaration Bentofix. NAUE GmbH & Co. KG, Espelkamp-Fiestel, DE.
- Posch M., Seppälä J., Hettelingh J. P., Johansson M., Margni M. and Joliet O. (2008) The role of atmospheric dispersion models and ecosystem sensitivity in the determination of characterisation factors for acidifying and eutrophying emissions in LCIA. In: *Int J LCA*(13), pp. 477-486.
- PRé Consultants (2015) SimaPro 8.0.6, Amersfoort, NL.
- PRé Consultants (2020) SimaPro 9.1.0.7, Amersfoort, NL.
- Schori S., Bauer C. and Frischknecht R. (2012) Life Cycle Inventory of Natural Gas Supply. Paul Scherrer Institut Villigen, Swiss Centre for Life Cycle Inventories, Dübendorf, CH, retrieved from: [www.ecoinvent.org](http://www.ecoinvent.org).
- Seppälä J., Posch M., Johansson M. and Hettelingh J. P. (2006) Country-dependent Characterisation Factors for Acidification and Terrestrial Eutrophication Based on Accumulated Exceedance as an Impact Category Indicator. In: *Int J LCA*, 11(6), pp. 403-416.
- Stolz P. and Frischknecht R. (2016a) Energieetikette für Personenwagen: Umweltkennwerte 2016 der Strom- und Treibstoffbereitstellung. treeze Ltd., Uster, CH.
- Stolz P., Messmer A. and Frischknecht R. (2016) Life Cycle Inventories of Road and Non-Road Transport Services. treeze Ltd., Uster CH.
- Stolz P. and Frischknecht R. (2016b) Life Cycle Inventories of Aluminium and Aluminium Profiles. treeze Ltd., Uster, CH.
- Struijs J., Beusen A., van Jaarsveld H. and Huijbregts M. A. J. (2009) Aquatic Eutrophication. In: *ReCiPe 2008 A life cycle impact assessment method which comprises harmonised category indicators at the midpoint and the endpoint level. Report I: Characterisation factors* (Ed. Goedkoop M., Heijungs R., Heijbregts M. A. J., De Schryver A., Struijs J. and Van Zelm R.).
- van Oers L., de Koning A., Guinée J. B. and Huppes G. (2002) Abiotic resource depletion in LCA. Road and Hydraulic Engineering Institute, Amsterdam.
- Van Zelm R., Huijbregts M. A. J., Den Hollander H. A., Van Jaarsveld H. A., Sauter F. J., Struijs J., Van Wijnen H. J. and Van de Meent D. (2008) European characterization factors for human health damage of PM10 and ozone in life cycle impact assessment. In: *Atmos Environ*, 42, pp. 441-453.
- Werner F. (2017) Background report for the life cycle inventories of wood and wood based products for updates of ecoinvent 2.2. Werner Environment & Development, Zürich, CH.
- WMO (2015) Scientific Assessment of Ozone Depletion: 2014. World Meteorological Organisation, Geneva.